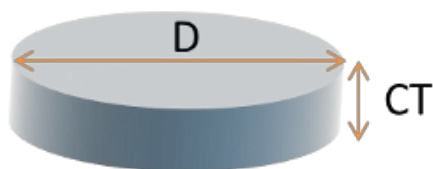


PN: ST-212-I-Y-A**INPUT PARAMETER**

| | |
|------------------------------|------------------------------------|
| Wavelength [nm]: | 1064 |
| Required Beam Diameter [mm]: | 7 |
| Beam Mode (SM/MM): | Single Mode TEM00 with $M^2 < 1.5$ |

ELEMENT PARAMETER

| | |
|----------------------|---------------|
| Element Type: | Window |
| Material: | Fused Silica |
| Element Size [mm]: | 20 |
| Clear Aperture [mm]: | 17.5 |
| Thickness [mm]: | 3 |
| Coating: | AR/AR coating |

OUTPUT PARAMETER

| | |
|----------------------------|---------------|
| Output Shape: | Square |
| Full Angle at 1/e2 [mRad]: | 1.00 |
| Transfer Region [mRad]: | 0.070 |
| Transmission efficiency: | Close to 100% |
| Overall Efficiency: | ~ 94% |

Holo/Or can improve the performances of this item. Please send us your requirements