




LDA512P25X-1.7-C

Near Infrared Linear Image Sensor (0.9 - 1.7µm) with 512 x 1 pixels

FEATURES	APPLICATIONS
<ul style="list-style-type: none"> ● 512 x 1 pixels (pixel size: S 25 x 25, M 25 x 250, L 25 x 500 µm²) ● 28-pin Ceramic DIP (CDIP) ● Built-in Temperature Sensor ● 0.9 µm - 1.7 µm Spectral Range ● Minimum Pixel Operability > 99% ● Quantum Efficiency > 70% ● Snapshot ITR / IWR ● One output with up to 22 MHz Pixel Rate 	<ul style="list-style-type: none"> ● Shortwave-Infrared Imaging ● Semiconductor Inspection / Process Monitoring ● Sorting / Recycling ● Near-Infrared Spectrophotometry

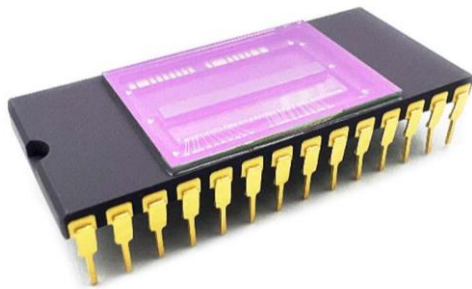

LDA512-C series is an uncooled near infrared linear image sensor consisting of a linear InGaAs-detector array bonded to a p-on-n readout-IC. The series includes three part-numbers with different sensor pixel sizes, LDA512P25S-1.7-C, LDA512P25M-1.7-C and LDA512P25L-1.7-C.

GENERAL DESCRIPTIONS

PARAMETER	UNIT	VALUE	
Sensor Technology	---	Planar InGaAs PIN	
Spectral Range	µm	0.9 - 1.7	
Actual Pixel Array	--	512 x 1	
Pixel Pitch	µm	25	
Pixel Size	µm	Pixel Size	Dimension
		S	25 x 25
		M	25 x 250
		L	25 x 500
Chip Size		15.3 x 4.5	
Package Type	---	28-pin Ceramic DIP (CDIP)	
Package Size L x W x T	mm	35.56 x 15.61 x 7.15	
Weight	g	5.09	



SPECIFICATIONS (ITS¹ = 20 ± 1°C)

PARAMETER		UNIT	VALUE	CONDITIONS
Dark Current ^{2,3}		fA	S ≤ 400	Photo pixel biased @ -0.5 V
			M ≤ 600	
			L ≤ 1000	
Quantum Efficiency ² * Fill Factor (QEFF)		%	≥ 70	λ = 1550 nm
Response Nonuniformity ²		%	≤ 5	At 50% Full Well
Response Nonlinearity ²		%	≤ 2	15% - 85% Well Occupation Range
Charge Capacity	Cint = 6.4 fF	μV/e ⁻	25	16 settings from 6.4fF to 2.1pF
	Cint = 16 fF		10	
	Cint = 30 fF		5.3	
	Cint = 120 fF		1.3	
	Cint = 2.1 pF		0.076	
Readout Noise	Cint = 6.4 fF	mV	1.2	ROIC Specifications
	Cint = 16 fF		0.8	
	Cint = 30 fF		0.6	
	Cint = 120 fF		0.5	
	Cint = 2.1 pF		0.25	
Output Swing		V	≥ 2.0	Gain @ 120 fF
Minimum Integration Period		μs	5	ROIC Specifications
Maximum Pixel Rate		MHz	22	ROIC Specifications
Pixel Operability ²		%	≥ 99	Percentage of Pixels with QEFF Deviation within ± 20%* (QEFF Mean)

1. Readings from Integrated Temperature Sensor (ITS).
2. These items are defined for central effective pixel array (512x1). Their values correspond to default operation conditions.
3. High gain, charge capacity @120fF, integration time 5ms.


ABSOLUTE MAXIMUM RATINGS

PARAMETER	UNIT	MIN.	MAX.
Operating Temperature ⁴	°C	-40	+70
Storage Temperature ⁴	°C	-40	+70
Power Consumption ⁵	mW	---	95

4. In non-condensing environment.
5. Without powering on the thermoelectric cooler.



PACKAGE OUTLINE (Unit: mm)

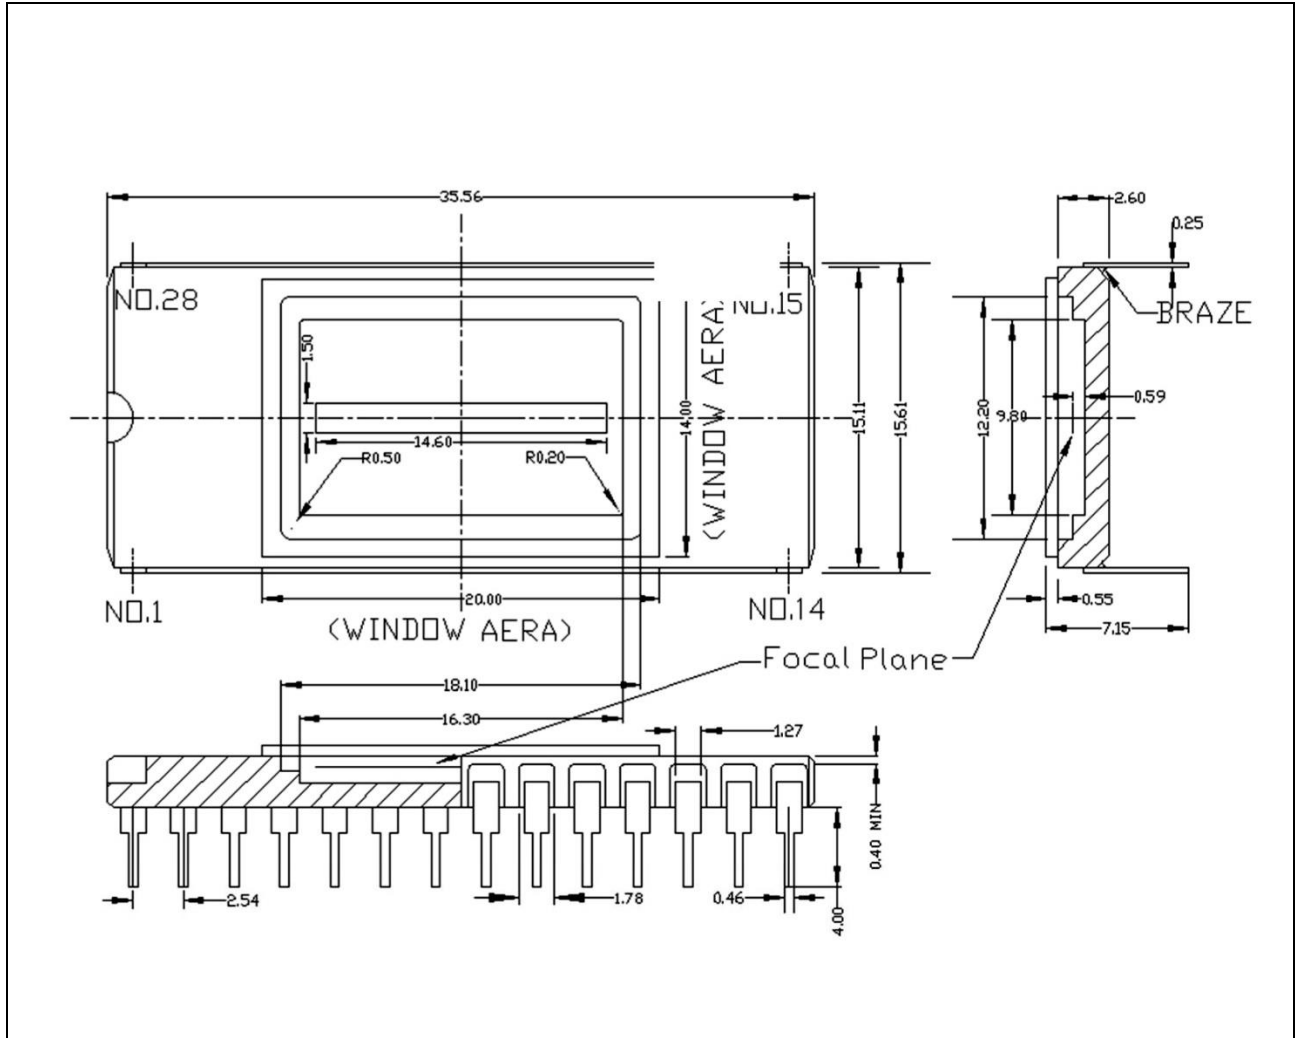


PIN DEFINITION

01	VDD_D	08	SDOUT	15	GND	22	NC
02	RESET	09	DATVALID	16	NC	23	NC
03	NC	10	VOUT	17	NC	24	NC
04	INT	11	VDDA	18	VTEMP	25	NC
05	MC	12	VR2	19	NC	26	NC
06	CEB	13	VR1	20	NC	27	NC
07	SDIN	14	VDETCOM	21	NC	28	NC



CHIP PROFILE


Layout

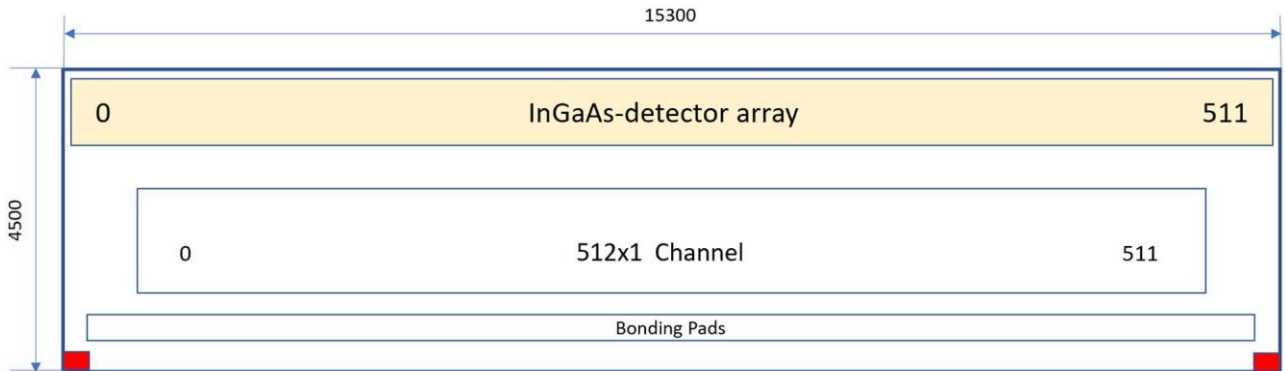

Chip size:15.3mm x 4.5mm

SPI Interface

LDA512 supports SPI protocol to set the command registers. There are functions of the gain mode, power consumption control and the sequence of pixel output.

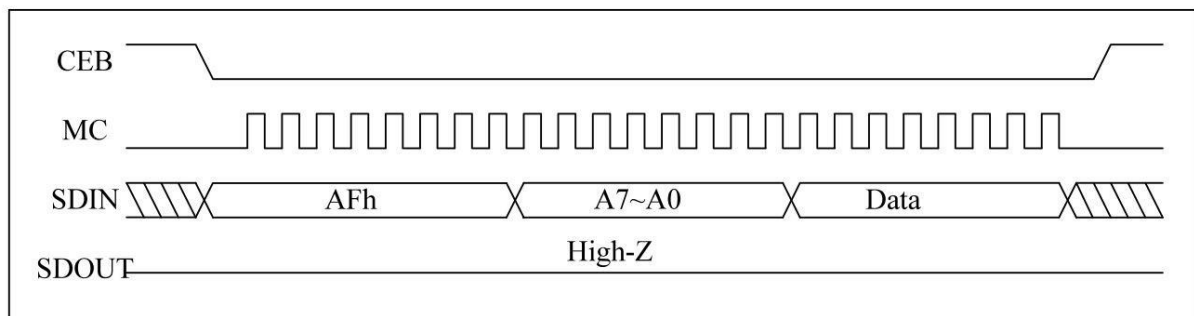

SPI Protocol Schematic



OPERATING CONDITIONS

Bias Input

Pin #	Bias	Voltage	Current	Remark
01	VDD	1.8 V	> 30 mA	Positive logic supply
11	VDDA	3.6 V	> 60 mA	Positive analog supply
12	VR2	0.3 V	> 30 mA	External Input Bias
13	VR1	2.3 V	> 5 mA	External Input Bias
14	VDETCOM	> VR1	--	Detector common voltage Detector bias ⁶ = VDETCOM - VR1
15	GND	0 V	--	Ground
02	RESET	1.8 V	--	Chip reset

6. VDETCOM lower than 2.3V will forward bias the sensor, the exact zero bias voltage is device and temperature dependent.

Digital Pattern Input

Pin #	Clocks	Levels	Rise/Fall	Remark
04	INT	1.8 V / 0 V	< 50 ns	Integration time
05	MC	1.8 V / 0 V	< 5 ns	Master clock, Max. Freq. = 22 MHz
06	CEB	1.8 V / 0 V	< 10 ns	Chip enable ⁷
07	SDIN	1.8 V / 0 V	< 5 ns	Data code input

7. The input and output of all commands starts after the falling edge of CEB.

Digital Pattern Output



Pin #	Clocks	Levels	Rise/Fall	Remark
08	SDOUT	1.8 V / 0 V	--	Data code output
09	DATVALID	1.8 V / 0 V	--	Valid data output flag signal

Analog Output

Pin #	Outputs	Levels	Value	Remark
10	VOUT	0.2 ~ 2.4 V	--	Video output
18	VTEMP	2.138 V	27 °C	Integrated Temperature Sensor (-0.6 mV/°C)



EXAMPLE CURVES

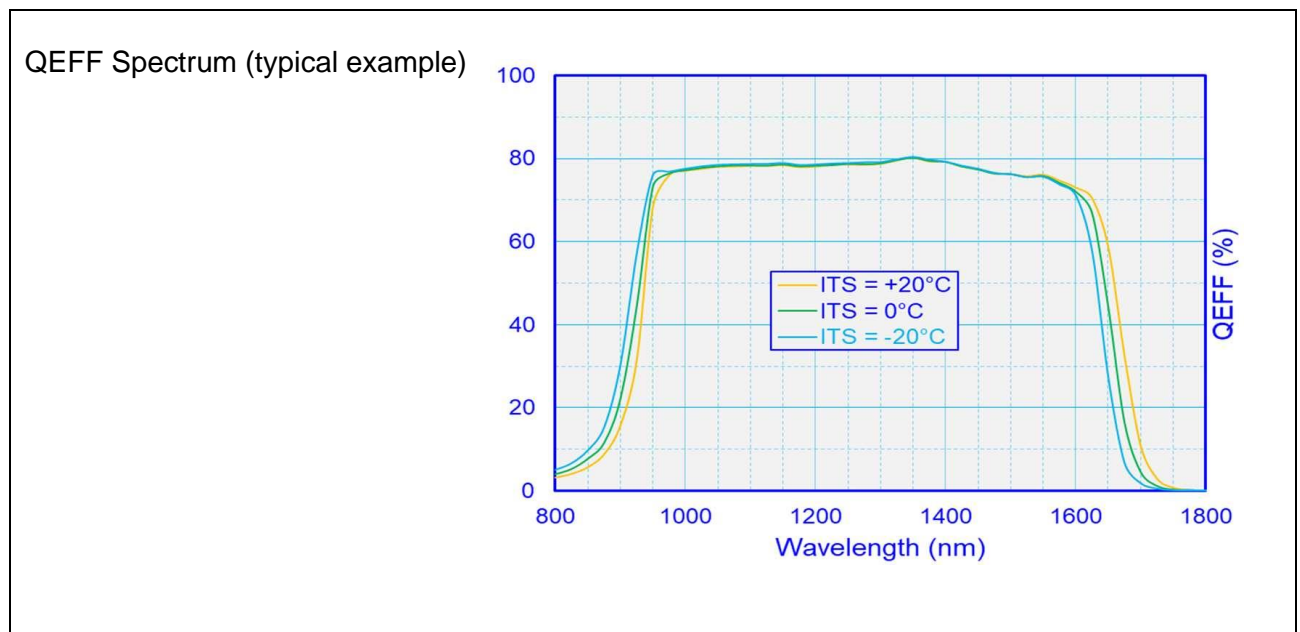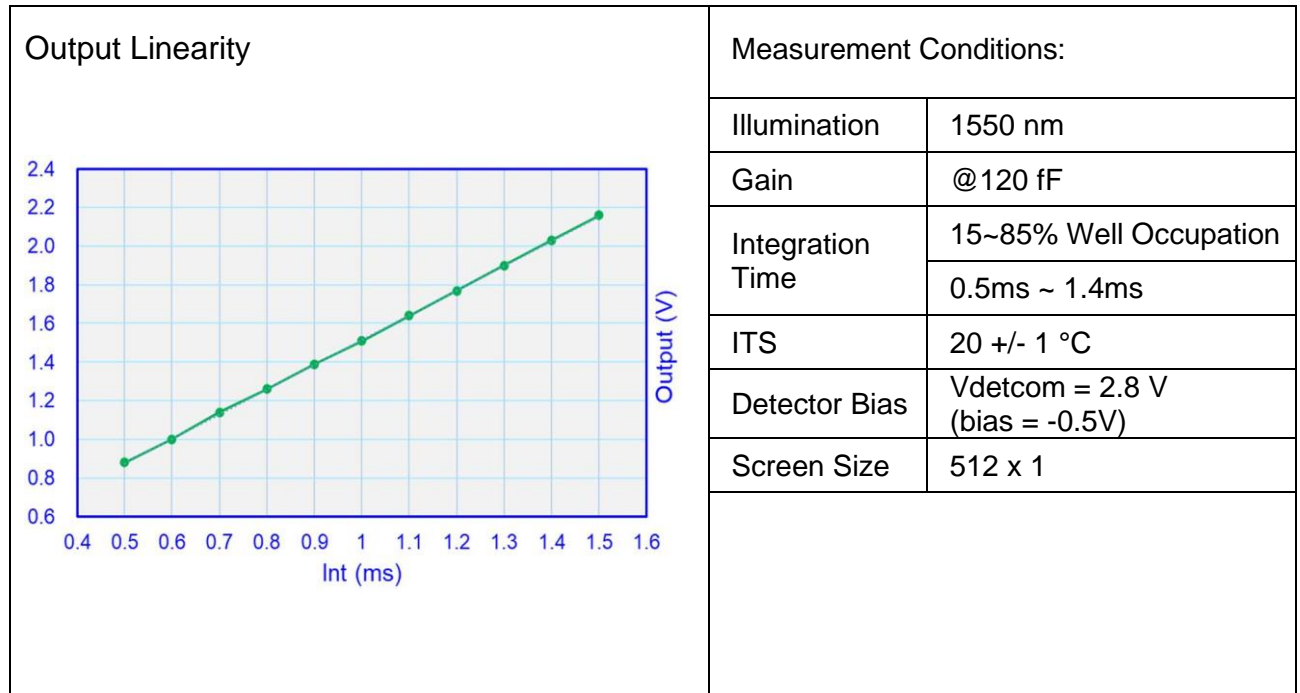

Copyright © 2023 ANDANTA GmbH. The information in this document is subject to change without notice. All rights reserved.